

Introduction


The DIN Rail IOT Gateway allows you to remotely monitor variables via a local network of wireless nodes.

Each Gateway can monitor 8 Digital Inputs and control 4 Digital Outputs.


General Ratings

Power Requirements	Gateway: 12-24Vdc Transmitter: 12-24Vdc
Inputs	8 Digital
Outputs	4 Volt Free Outputs
Gateway Connection Method	WiFi
Unit mounting	DIN Rail Mounting
Dimensions	94mm width (Along Din Rail) 90mm depth (Across Din Rail) 62mm height
Operating temperature	-20 to +70 °C 0 to 70 °C 10-95% RH (non-condensing)

Connections:

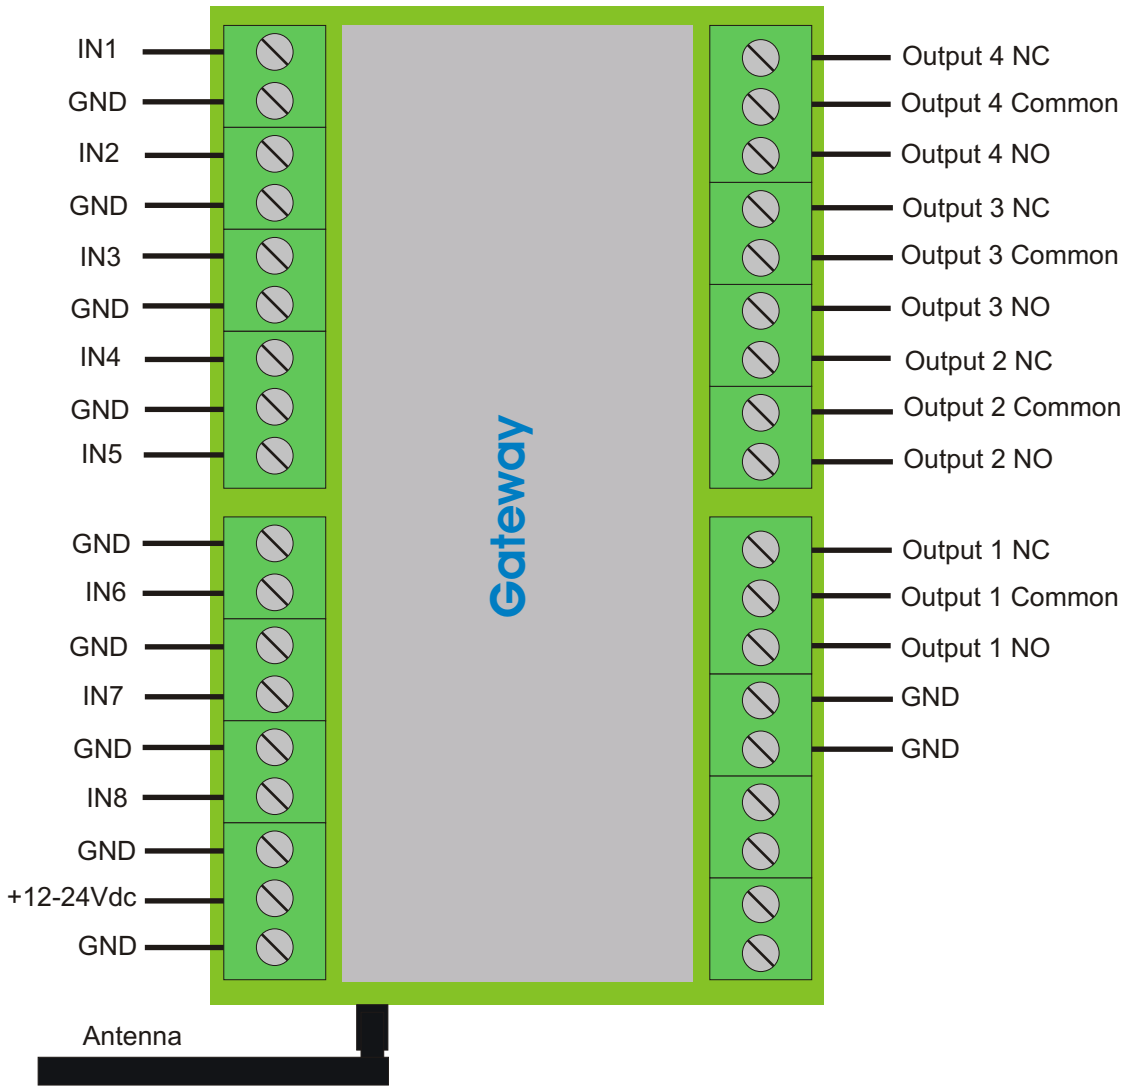

Example use:

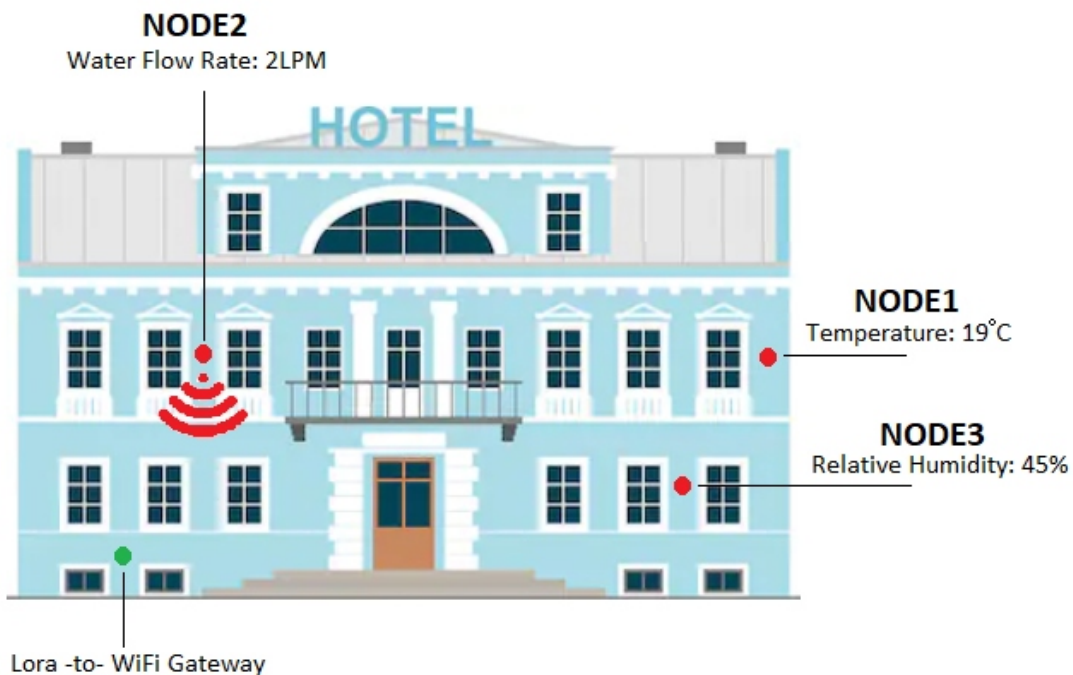

Data Sheet Issue: 1.01
Date: 19 November 2020

Order Codes

<u>Part Number</u>	<u>Description</u>
FSC-1198	Gateway

COLTER GROUP
COLTER PRODUCTS LIMITED

UNIT 7, ZONE C
CHELMSFORD ROAD INDUSTRIAL ESTATE
DUNMOW
ESSEX
CM6 1HD

Telephone: + 44 (0)1371 876887
Fax: + 44 (0)1371 875638

E-Mail: sales@coltergroup.co.uk
Website: www.coltergroup.co.uk

© Copyright 2020

The unit described on this datasheet is designed and manufactured in Great Britain by Colter Products Ltd.
Colter Products reserve the right to amend these specifications and the user is asked to check the validity of the datasheet prior to use

