




Sheet Steel Enclosed Double Break Switchfuses

- Fully load rated AC23A 415 to 690V.
- Fitted with general purpose BS88 HRC fuses.
- Double break, fuses isolated on both sides.
- BSEN60947-3 Conformity.
- Door interlocked padlockable handles.
- Removable gland plate top (up to 700h) and bottom.

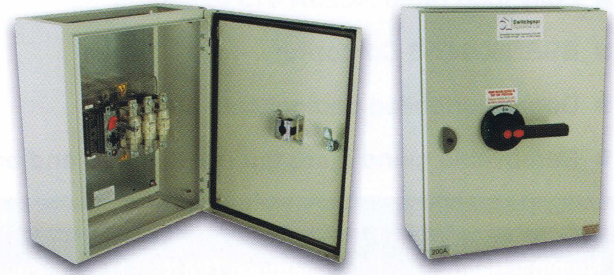

Nominal Rating I _e 415V		Reference TP&N ie. 3P & solid neutral	Reference 4 pole ie. 3P & switched neutral	Ingress Protection	Fuse Type (included)	Dimensions					
						H	W	D	A	Ø	B
63A	30kW	ST IHF 6/3+N+F	ST IHF 6/4+F	IP55	BAO	400	300	200	14	M5	143
100A	45kW	ST IHF 10/3+N+F	ST IHF 10/4+F	IP55	CEO	500	400	200	20	M8	173
125A	55kW	ST IHF 12/3+N+F	ST IHF 12/4+F	IP55	DEO	500	400	200	20	M8	173
160A	75kW	ST INF 16/3+N+F	ST INF 16/4+F	IP55	DD	500	400	200	20	M8	194
200A	105kW	ST INF 20/3+N+F	ST INF 20/4+F	IP55	DD	700	500	250	25	M10	282
250A	132kW	ST INF 25/3+N+F	ST INF 25/4+F	IP55	ED	700	500	250	30	M10	282
315A	155kW	ST INF 30/3+N+F	ST INF 30/4+F	IP55	ED	700	500	250	30	M10	282
400A	200kW	ST INF 40/3+N+F	ST INF 40/4+F	IP55	ED	800	600	300	40	M12	300
500A	355kW	ST INF 50/3+N+F	ST INF 50/4+F	IP55	FF	1000	600	300	40	M12	400
630A	355kW	ST INF 63/3+N+F	ST INF 63/4+F	IP55	FF	1000	600	300	40	M12	400
800A	400kW	ST INF 80/3+N+F	ST INF 80/4+F	IP55	GF	1200	800	300	40	M12	500

Enclosures are selected to provide adequate wiring room for "standard" cables. Larger enclosures to suit customer's individual requirements together with IP65, Stainless Steel and GRP enclosures, are also available.

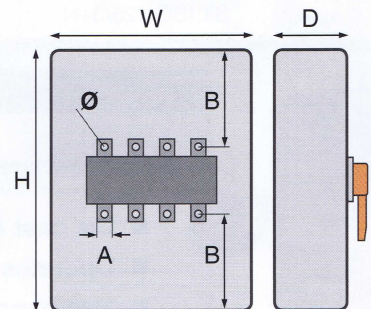

- Alternative fuse link ratings.
- Spreader terminals and multi cable connection facilities.
- Alternative voltage requirements 1000V AC and DC.
- Auxiliary contacts 1 x N/O, 1 x N/C to retro fit.
- Aluminium, Tufnol or brass gland plates.
- Indicator lamps or additional equipment.

